

SOLUTION PROVIDER  
FOR COOLING SYSTEMS



At Each Point Where the  
Comfort is important

ELEVATOR AIRCONDITIONER



Turkey

Discover  
the potential

[www.KLIMEXS.com](http://www.KLIMEXS.com)



**klimexs**<sup>®</sup>  
Industrial Cooling Systems

**2000W - 4000W**  
Cooling Capacity

EC 2000


EC 4000

### About Elevator Air Conditioners

Installation of elevator air conditioning system is made to the top of the elevator. Unit, cools down the sucked air and sends cool air inside of the elevator cabin.

This cooling system is very economic and application takes very short times. Installation is just about 15 min.

### Technical Drawing



A 475mm  
B 760mm  
C 515mm



**klimeks®**  
Industrial Cooling Systems

QR CODE

ÜRETİCİ/MANUFACTURER: UZMAN TEKNİK ENDÜSTRİYEL  
KLİMA ÜRETİM A.Ş. +90(288) 417 16 86

TİP/TYPE: PANO KLİMASI/CABINET AIR CONDITIONER

MODEL/MODEL	EC 2000
SOĞUTMA GÜCÜ/COOLING CAPACITY	2020 W-L35/L35
ÇALIŞMA VOLTAJI/VOLTAGE	220-230V/50-60Hz
SOĞUTUCU GAZ/REFRIGERANT GAS	R410a / 1000 g
AĞIRLIK/WEIGHT	60 kg
EBATLAR/DIMENSIONS	760X515X475mm
GÜÇ TÜKETİMİ/POWER	905 W
HAVA DEBİSİ/AIR FLOW	600 m <sup>3</sup> /h
SİGORTA/FUSE	16 A
AZAMİ AKIM/CURRENT	4 A
KORUMA SINIFI/PROTECTION FLOW	IP 54


Barcode

EC 869211120001VN33-0000

info@klimeks.com / www.klimeks.com

MADE IN TURKEY

### Installation Template

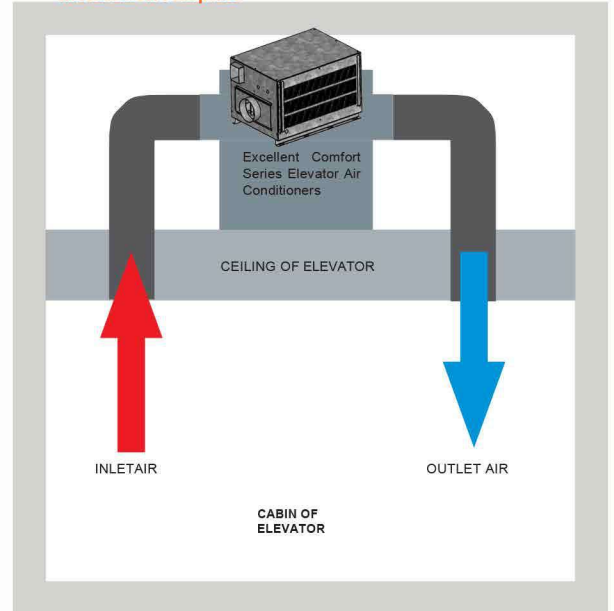

*Danfoss*  
ebmpapst

# Elevator Air Conditioner

# Excellent Comfort Elevator Air Conditioner



## Advantages

- 1 You can set the desired cabin temperature via digital thermometer, thermostat.
- 2 Air conditioner is installed to the top of the elevator cabin, installation time is 15 min.
- 3 2 sections/holes should be opened for suck and blowing to install the device.
- 4 Installation finishes after mounting air distributor vent on the ceiling sheet where illumination armatures placed.
- 5 Energizing the device, is enough to work it for years without any problem.
- 6 Undrained comprised water vapors in the system.
- 7 Temperature control device is mounted on the air conditioner.



Max distance  
between air influent  
and effluent



Convenience  
for 50 and  
60 Hz



Conservation  
class according  
to panel



Standard  
Controller



Easy  
mounting




Auto restart



Ozone  
protection



- PROJECT MANAGEMENT, PROJECT PRODUCTION CONSULTANCY
- PROJECT PRODUCTION and SALE
- SERVICE CONSULTANCY AFTER SALE
- TECHNICAL SERVICE and SPARE PART SUPPORT
- MAINTENANCE DEAL



#### Head Office

Atatürk Mh, Yeni San.Sit. 3.Sk. No:46  
Lüleburgaz/KIRKLARELİ  
Phone: +90 (288) 412 69 70  
Phone2: +90 (288) 417 16 86  
e-mail: info@klimexs.com

#### Europe Office - Bulgaria

АДРЕС: гр. Пловдив, кв. Коматеве,  
Складова база "Транс Кикъов" №21  
МОБ : +359 878 353 595 (Whatsapp / Viber)

#### Contact to Our Service

Phone: +90 (288) 412 69 70  
Phone2: +90 (288) 417 16 86

Call us for your problems, for suggestions with our Professional solution-oriented team.

[www.klimexs.com](http://www.klimexs.com)  
[info@klimexs.com](mailto:info@klimexs.com)